

SLM21 Series

6 Contacts Safety Door Switch



Safety protection forced lock

- EN 60947-5-1/IEC 60947-5-1
- GB/T 14048.5
- EN ISO 14119/ISO 14119
- GB/T 18831



Product Introduction

SLM21 series safety door switch with multiple models for selection, adjustable inserting head and various operational key ensure a flexible installation. 1300N holding force and IP67 protection rate ensure its widely applied in different environment.

Product Feature

- Multiple contacts for selection.
- Holding force 1300N.
- IP67 protection rate.
- Various inserting direction.
- Support general load or micro-load.

Technical Parameter

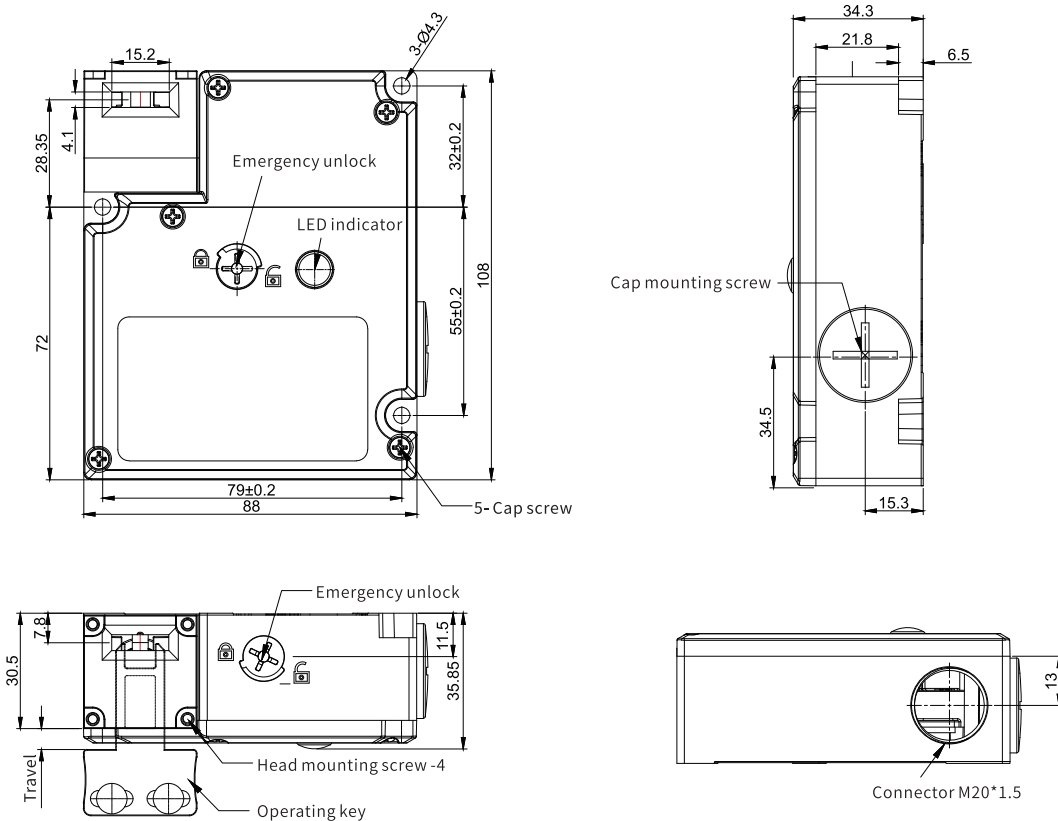
Electromagnetic Tube		
Rated Operating Voltage	DC24V	
Power	4.8W	
Rated Current	Approximate 200mA	
Insulation	Class B (130°C)	
LED Indicator		
Rated Operating Voltage	DC24V	
Rated Current	Approximate 1mA	
Luminous Color (LED)	Green	
Safety Level	PL d (ISO 13849-1)	
Certificates	CE, TUV Rheinland	
Standard	EN60947-5-1、IEC60947-5-1. GB/T 14048.5. EN ISO 14119. GB/T 18831	
Protection Rate	IP67	
Material	PA66 fire retardant	
Mechanical Lifespan	Over 1,000,000 times	
Electrical Lifespan	Over 150,000 times (AC240V3A resistance load)	
Using Type	AC-15	DC-13
Rated Operating Voltage (Ue)	240V	24V
Rated Operating Current (Ie)	3A	2A
Electrical Parameters		
Contact Resistance	<200 mΩ	
Nominal Discharge Current (Ith)	10A	
Rated Insulation Voltage (Ui)	300V	
Anti-electric Shock Level	Class II (Dual Insulation)	
Pulse Withstand Voltage (EN60947-5-1)	2.5KV	
Insulation Resistance	100MΩ above	
Short-circuit Protection	10A, 250V requires a quick-break fuse	
Vibration Resistance	10-55Hz double amplitude 1.5mm	
Impact Resistance	Durability 1000m/s²	
Conditional Short-circuit Current	100A (EN 60947-5-1)	
Space of Contact	2×2mm above	
Action Characteristic		
Direct Opening Force	Min. 60N	
Direct Opening Travel	Over 10mm	
Allowed Operating Speed	0.1 m~0.5m/s	
Allowed Operating Frequency	Maximum 30 times/minutes	
Holding Force	1300N	
Environment		
Pollution (Operating Environment)	3 (EN60947-5-1)	
Operating Temperature	-10°C~+55°C (no freezing)	
Operating Humidity	<95%RH	

SLM21 Series Safety Door Switch

Model Selection (e.g.: SLM21-BPMF2)

Product Series	Switch Contact (Door Monitor + Lock Monitor)	Head Ddirection/ Material	Door lock/ Release Method	Key Inserting Direction	Gland
SLM21	—	□	□	□	□
A: 1NC/1NO(Slow action) + 1NC/1NO(Slow action) B: 1NC/1NO(Slow action) + 2NC (Slow action) C: 2NC (Slow action)+ 1NC/1NO (Slow action) D: 2NC(Slow action) + 2NC(Slow action) E: 2NC/1NO(Slow action) + 1NC/1NO (Slow action) F: 2NC/1NO(Slow action) + 2NC(Slow action) G: 2NC/1NO (Slow action)+2NC/1NO(Slow action) H: 3NC(Slow action) + 1NC/1NO(Slow action) I: 3NC(Slow action) + 2NC(Slow action) J: 3NC (Slow action)+3NC(Slow action) K: 3NC(Slow action) + 2NC/1NO(Slow action) L: 2NC/1NO (Slow action)+ 3NC(Slow action)		P: 4 optional directions (Default front side installation)/ plastic M: 4 optional directions (Default front side installation)/ metal	M: DC24V power to release E: DC24V power to lock	T: Top F: Front	2: M20

Product Size



SLM21 Model Selection Table

Release Position	Head Material	Magnetic Voltage/ Indicator	Lock/Release Method	Contact Type (Door Monitor + Lock Monitor)	Gland Size	Model
Top release	Plastic	Electromagnetic DC24V Green LED	Power to release	1NC/1NO+1NC/1NO	M20	SLM21-APMT2
				1NC/1NO+2NC	M20	SLM21-BPMT2
				2NC+1NC/1NO	M20	SLM21-CPMT2
				2NC+2NC	M20	SLM21-DPMT2
				2NC/1NO+1NC/1NO	M20	SLM21-EPMT2
				2NC/1NO+2NC	M20	SLM21-FPMT2
				2NC/1NO+2NC/1NO	M20	SLM21-GPMT2
				3NC+1NC/1NO	M20	SLM21-HPMT2
				3NC+2NC	M20	SLM21-IPMT2
				3NC+3NC	M20	SLM21-JPMT2
				3NC+2NC/1NO	M20	SLM21-KPMT2
				2NC/1NO+3NC	M20	SLM21-LPMT2
			Power to lock	1NC/1NO+1NC/1NO	M20	SLM21-APET2
				1NC/1NO+2NC	M20	SLM21-BPET2
				2NC+1NC/1NO	M20	SLM21-CPET2
				2NC+2NC	M20	SLM21-DPET2
				2NC/1NO+1NC/1NO	M20	SLM21-EPET2
				2NC/1NO+2NC	M20	SLM21-FPET2
				2NC/1NO+2NC/1NO	M20	SLM21-GPET2
				3NC+1NC/1NO	M20	SLM21-HPET2
				3NC+2NC	M20	SLM21-IPET2
				3NC+3NC	M20	SLM21-JPET2
				3NC+2NC/1NO	M20	SLM21-KPET2
				2NC/1NO+3NC	M20	SLM21-LPET2
	Metal	Electromagnetic DC24V Green LED	Power to release	1NC/1NO+1NC/1NO	M20	SLM21-AMMT2
				1NC/1NO+2NC	M20	SLM21-BMMT2
				2NC+1NC/1NO	M20	SLM21-CMMT2
				2NC+2NC	M20	SLM21-DMMT2
				2NC/1NO+1NC/1NO	M20	SLM21-EMMT2
				2NC/1NO+2NC	M20	SLM21-FMMT2
				2NC/1NO+2NC/1NO	M20	SLM21-GMMT2
				3NC+1NC/1NO	M20	SLM21-HMMT2
				3NC+2NC	M20	SLM21-IMMT2
				3NC+3NC	M20	SLM21-JMMT2
				3NC+2NC/1NO	M20	SLM21-KMMT2
				2NC/1NO+3NC	M20	SLM21-LMMT2
			Power to lock	1NC/1NO+1NC/1NO	M20	SLM21-AMET2
				1NC/1NO+2NC	M20	SLM21-BMET2
				2NC+1NC/1NO	M20	SLM21-CMET2
				2NC+2NC	M20	SLM21-DMET2
				2NC/1NO+1NC/1NO	M20	SLM21-EMET2
				2NC/1NO+2NC	M20	SLM21-FMET2
				2NC/1NO+2NC/1NO	M20	SLM21-GMET2
				3NC+1NC/1NO	M20	SLM21-HMET2
				3NC+2NC	M20	SLM21-IMET2
				3NC+3NC	M20	SLM21-JMET2
				3NC+2NC/1NO	M20	SLM21-KMET2
				2NC/1NO+3NC	M20	SLM21-LMET2













SLM21 Series Safety Door Switch

 **SLM21 Model Selection Table**

Release Position	Head Material	Magnetic Voltage/ Indicator	Lock/Release Method	Contact Type (Door Monitor + Lock Monitor)	Gland Size	Model
Front release	Plastic	Electromagnetic DC24V Green LED	Power to release	1NC/1NO+1NC/1NO	M20	SLM21-APMF2
				1NC/1NO+2NC	M20	SLM21-BPMF2
				2NC+1NC/1NO	M20	SLM21-CPMF2
				2NC+2NC	M20	SLM21-DPMF2
				2NC/1NO+1NC/1NO	M20	SLM21-EPMF2
				2NC/1NO+2NC	M20	SLM21-FPMF2
				2NC/1NO+2NC/1NO	M20	SLM21-GPMF2
				3NC+1NC/1NO	M20	SLM21-HPMF2
				3NC+2NC	M20	SLM21-IPMF2
				3NC+3NC	M20	SLM21-JPMF2
				3NC+2NC/1NO	M20	SLM21-KPMF2
				2NC/1NO+3NC	M20	SLM21-LPMF2
			Power to lock	1NC/1NO+1NC/1NO	M20	SLM21-APEF2
				1NC/1NO+2NC	M20	SLM21-BPEF2
				2NC+1NC/1NO	M20	SLM21-CPEF2
				2NC+2NC	M20	SLM21-DPEF2
				2NC/1NO+1NC/1NO	M20	SLM21-EPEF2
				2NC/1NO+2NC	M20	SLM21-FPEF2
				2NC/1NO+2NC/1NO	M20	SLM21-GPEF2
				3NC+1NC/1NO	M20	SLM21-HPEF2
				3NC+2NC	M20	SLM21-IPEF2
				3NC+3NC	M20	SLM21-JPEF2
				3NC+2NC/1NO	M20	SLM21-KPEF2
				2NC/1NO+3NC	M20	SLM21-LPEF2
	Metal	Electromagnetic DC24V Green LED	Power to release	1NC/1NO+1NC/1NO	M20	SLM21-AMMF2
				1NC/1NO+2NC	M20	SLM21-BMMF2
				2NC+1NC/1NO	M20	SLM21-CMMF2
				2NC+2NC	M20	SLM21-DMMF2
				2NC/1NO+1NC/1NO	M20	SLM21-EMMF2
				2NC/1NO+2NC	M20	SLM21-FMMF2
				2NC/1NO+2NC/1NO	M20	SLM21-GMMF2
				3NC+1NC/1NO	M20	SLM21-HMMF2
				3NC+2NC	M20	SLM21-IMMF2
				3NC+3NC	M20	SLM21-JMMF2
				3NC+2NC/1NO	M20	SLM21-KMMF2
				2NC/1NO+3NC	M20	SLM21-LMMF2
			Power to lock	1NC/1NO+1NC/1NO	M20	SLM21-AMEF2
				1NC/1NO+2NC	M20	SLM21-BMEF2
				2NC+1NC/1NO	M20	SLM21-CMEF2
				2NC+2NC	M20	SLM21-DMEF2
				2NC/1NO+1NC/1NO	M20	SLM21-EMEF2
				2NC/1NO+2NC	M20	SLM21-FMEF2
				2NC/1NO+2NC/1NO	M20	SLM21-GMEF2
				3NC+1NC/1NO	M20	SLM21-HMEF2
				3NC+2NC	M20	SLM21-IMEF2
				3NC+3NC	M20	SLM21-JMEF2
				3NC+2NC/1NO	M20	SLM21-KMEF2
				2NC/1NO+3NC	M20	SLM21-LMEF2

Contacts Action


Below wire diagram for switch with key inserts & lock status. (Terminal 12 & 41, 22&51, 32&61 is inside connection)

Model	Contact (Door Minitor+ Lock Monitor)	Wire Diagram		Contact Action Contact ON Contact OFF
		Door Monitor	Lock Monitor	
		 02  01 E2  E1 (-) (+)		Operation key complete insertion Travel Operation key extraction 
SLM21 - AP□□□ SLM21 - AM□□□	1NC/1NO + 1NC/1NO			Lock position 
SLM21 - BP□□□ SLM21 - BM□□□	1NC/1NO + 2NC			Lock position 
SLM21 - CP□□□ SLM21 - CM□□□	2NC + 1NC/1NO			Lock position 
SLM21 - DP□□□ SLM21 - DM□□□	2NC + 2NC			Lock position 
SLM21 - EP□□□ SLM21 - EM□□□	2NC/1NO + 1NC/1NO			Lock position 
SLM21 - FP□□□ SLM21 - FM□□□	2NC/1NO + 2NC			Lock position 
SLM21 - GP□□□ SLM21 - GM□□□	2NC/1NO + 2NC/1NO			Lock position 
SLM21 - HP□□□ SLM21 - HM□□□	3NC + 1NC/1NO			Lock position 
SLM21 - IP□□□ SLM21 - IM□□□	3NC + 2NC			Lock position 
SLM21 - JP□□□ SLM21 - JM□□□	3NC + 3NC			Lock position 
SLM21 - KP□□□ SLM21 - KM□□□	3NC + 2NC/1NO			Lock position 
SLM21 - LP□□□ SLM21 - LM□□□	2NC/1NO + 3NC			Lock position 


SLM21 Series Safety Door Switch

✂ Product Installation

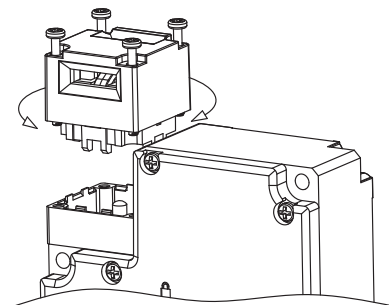
- ★ Loosen 4 screws on top of head, rotate the head to the right key inserting position and then install it.



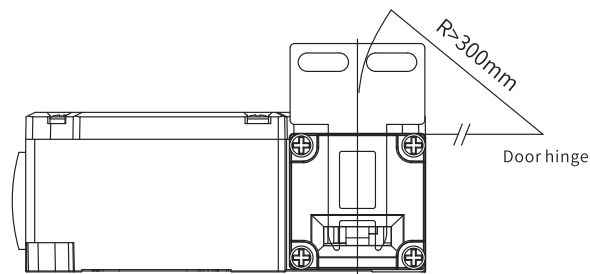- ★ When install on slide hung door, it should be over than semidiameter.



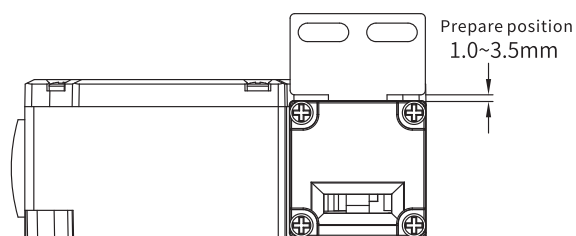- ★ Please install the safety switch and insertion key under range 1-3.5mm.



- ★ The installation of operation key allows $\pm 1\text{mm}$ deviation within the key insertion center of the hole.

